



# Explosion-Proof Fire Alarm Pull Station

## Model MPEX

### TWO-STEP OPERATION PREVENTS ACCIDENTAL ACTIVATION

- Highly visible red enclosure
- Lift cover and pull down ring to activate
- Available in 120VAC
- Approved for Class I, Division 1 explosion-proof applications
- UL Listed, CSA Approved, CSFM Approved


The Model MPEX Explosion-Proof Pull Station is designed for harsh environments. The unit is rated for Class I, Division 1 & 2, Groups C & D; Class II, Division 1 & 2, Groups E, F and G; and Class III. MPEX is rated NEMA 7 for Groups C & D and NEMA 9 for Groups E, F and G.

The Model MPEX Explosion-Proof Pull Station is designed for hazardous locations where flammable gasses or vapors, combustible dusts or easily ignitable fibers are present. The unique swing-up front cover exposes a pull-down ring which activates the alarm; this two-step process prevents accidental activation. The MPEX is reset by depressing the shaft and returning the plate to its original position. Contacts on the unit are rated 120VAC, 60Hz at six amps continuous.

Rugged enclosure is made of copper-free cast aluminum alloy. Installation is made easy via the feed through  $\frac{3}{4}$ " conduit openings found on either end of the MPEX. It is painted bright red for high visibility and has clearly marked operating instructions on the face plate for the user.



## EXPLOSION-PROOF PULL STATION (MPEX)

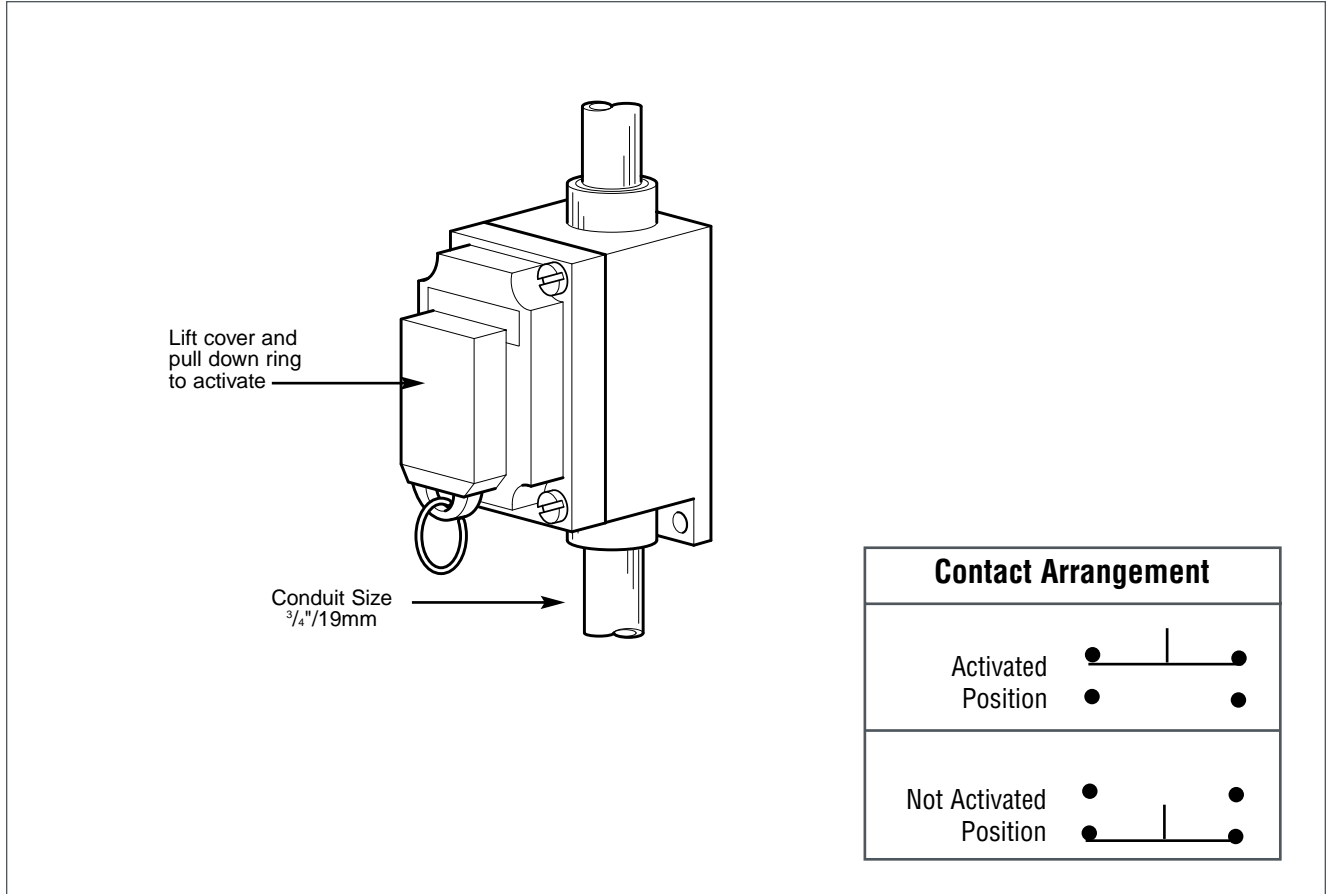

### SPECIFICATIONS

Net Weight:	2.4 lbs.	1.09 kg
Shipping Weight:	2.7 lbs.	1.23 kg
Height:	6.4"	16.26 cm
Width:	3.1"	7.87 cm
Depth:	4.1"	10.41 cm

### RATINGS

- NEMA Type 7 enclosure for Groups C and D; NEMA 9 enclosure for Groups E, F and G
- Constructed to IP65

### HOW TO ORDER

- Specify model number